

PRODUCTS AND ACCESSORIES

AIRBOSS SHELTER SYSTEMS

Family of expeditionary shelters and isolation units for decontamination and general-purpose employment, as well as a breadth of accessories for crisis response, medical contingency, and command and control of operations.

ADG
AIRBOSS DEFENSE GROUP

TABLE OF CONTENTS

SHELTERS

DECONTAMINATION SHELTERS

Individual.....	3
2-Line	4
3-Line	5
4-Line	6

GENERAL PURPOSE SHELTERS

Command Post	7
First Response	8
Casualty Management.....	9
S-Frame	10
Vehicle Topper.....	11
Body Scene and Forensics Shield	11

ACCESSORIES

SHELTER ACCESSORIES

External Hazmat Basin	13
Internal Containment Basin	13
Waste Storage Bladder	14
Air Heater - Diesel Indirect Fired	14
Flash Water Heater	15
Light Fixture.....	16
Waste Water Pump	16
Hand Truck and Transport Cart	17
Anchoring Options.....	18
Litter Conveyor and Board	19
Portable Bench	20
Portable Drafting Table	20

PART NUMBERS

DECONTAMINATION SHELTERS

Individual	22
2-Line	22
3-Line	22
4-Line	22

GENERAL PURPOSE SHELTERS

Command Post	22
First Response.....	22
Casualty Management.....	23
S-Frame	23
Vehicle Topper.....	23
Vehicle Topper Accessories	23
Body Scene and Forensics Shield	23

SHELTER ACCESSORIES

External Hazmat Basins	24
Internal Containment Basins	24
Waste Storage Bladder	24
Potable Bladder.....	24
Air Heater	24
Flash Water Heater	25
Light Fixture.....	25
Waste Water Pump	25
Hand Truck.....	25
Transport Cart.....	25
Platform Truck.....	25
Anchoring Options.....	25
Litter Conveyor and Board	25
Portable Bench	26
Portable Drafting Table	26
General Shelter Repair Parts.....	26
Replacement Strut Sets.....	26
Shelter Repair Kits	26
Water and Plumbing.....	27
Miscellaneous Shelter Parts	27

DECONTAMINATION SHELTERS

These lightweight and compact shelters include shower nozzles on interior fabric to saturate patients with 360° of spray and internal berm to contain wastewater. The shelters are also available in system packages that include additional fittings designed for heavy use and additional accessories and components.

INDIVIDUAL DECONTAMINATION SHELTER

The individual decontamination shelter provides a secure decontaminable area for the thorough cleaning and decontamination of an ambulatory participant. The shelter accommodates individuals fully outfitted in PPE.



KEY FEATURES

Patented articulating frame design

The patented articulating frame facilitates rapid deployment, and the shelter can operate with 30% of the frame missing or broken.

Patented corrosion-resistant anodized aluminum frame

A patented, corrosion-resistant anodized aluminum frame with chemical-resistant fabric provides long life and reliability.

Durable and retardant interior fabric

The UV-stable, fire retardant, and chemical-resistant fabric on the interior protects the exterior frame from contaminants and expedites post-use clean-up.

Space-efficient storage

This shelter is space-efficient for facilities with limited space and stores to 26" x 26" x 26".

On/Off-capable shower nozzles

On/Off-capable shower nozzles on interior fabric saturate patients with 360° of spray. It maintains system integrity and maximizes decon capability. Nozzles can easily turn on or off for the user's specific needs.

Internal Berm to contain wastewater

The interior berm covers the entire floor of the decon area to contain wastewater run-off.

INDIVIDUAL SHELTER

Part Number	SD1-TTB02-GZ (Shelter only)
Part Number	SYS-Ind-10-13-1 (System)
See index for a complete listing of part numbers.	
Exterior Fabric	None
Interior Fabric	Yellow exterior White interior
Interior Dimensions	5'3" L x 5'6" W x 7'5" H (1.6 x 1.7 x 2.3 m)
Exterior Dimensions	5'6" L x 6'11" W x 8'3" H (1.68 x 2.11 x 2.51 m)
Shelter Stored Cube	2.17' x 2.17' x 2.17' (0.66 x 0.66 x 0.66 m)
Shelter Weight	55 lb (24.95 kg)
Shipping Weight	95 lb (43.09 kg)
Water Booms	1
Body Sprays	7 total at 1 GPM each
Quick Connects for Hand Wands	1

SHELTER ONLY INCLUDES:


Part Number: SD1-TTB02-GZ

- 1 Interior berm
- 1 6" diameter snorkeled port per side
- 2 2-panel zippered end doors with Velcro straps
- 1 Anchor kit
- 1 Repair kit
- 1 Hose adapter kit
- 1 Transport bag
- 1 Ground cloth

SHELTER SYSTEM INCLUDES:

Part Number: SYS-Ind-10-13-1

- Includes all shelter-only items, plus . . .
- 1 Water hose
 - 1 Hand sprayers
 - 1 Waste storage bladder
 - 1 Waste water pump
 - 2 Floor risers



2-LINE DECONTAMINATION SHELTER

The 2-line decontamination shelter provides a secure decontaminable area for the effective decontamination of mass casualties. It has a compact footprint in a highly portable and lightweight package.



KEY FEATURES

Pre-fabricated decontamination design

The pre-fabricated decontamination design ensures state-of-the-art performance, reliability, and speed of deployment.

Integral cloth booms

Integral cloth booms, pre-plumbed quick connects, and a patented articulating frame reduce set-up time, maintain system integrity, and increase functionality.

Curtain set with ground clips

A curtain set with ground clips segregates male, female, and non-ambulatory patients, providing undress, wash, rinse, and redress stations in the ambulatory lanes.

Patented active curtains

Patented Active Curtains saturate patients with directional 360° of spray with five nozzles per station.

Internal ergonomic hand sprayers

Internal ergonomic hand sprayers enable decontamination of non-ambulatory casualties with user-directed spray (ordered separately).

Patented corrosion-resistant anodized aluminum shelter frame

A patented, corrosion-resistant anodized aluminum frame with chemical-resistant fabric provides long life and reliability.

Interior liner with white, opaque skylight

The interior canopy includes a white, opaque skylight that provides ambient lighting. The canopy protects the exterior frame from contaminants and expedites post-use cleanup.

Camlock connectors allow easy plumbing

Camlock connectors allow easy plumbing connection with gloved hands.

2-LINE SHELTER	
Part Number	SD2-TZB08-GZ (Shelter only)
Part Number	SYS-2 Line 8-20-1 (System)
See index for a complete listing of part numbers.	
Exterior Fabric	None
Interior Fabric	Yellow exterior White interior w/skylight
Interior Dimensions	19'9" L x 8'2" W x 7'3" H (6.0 x 2.5 x 2.2 m)
Exterior Dimensions	19.75" L x 9.83' W x 8.08' H (6.02 x 3 x 2.46 m)
Shelter Stored Cube	3'3" x 3'3" x 3'3" (1.02 x 1.02 x 1.02 m)
Shelter Weight	145 lb (65.77 kg)
Shipping Weight	320 lb (145.15 kg)
Water Booms	2
Body Sprays	20 total at 0.4 GPM each
Quick Connects for Hand Wands	4

SHELTER ONLY INCLUDES:

Part Number: SD2-TZB08-GZ


- | | |
|--|---|
| 1 Center divider | 1 14" diameter snorkeled port per side |
| 6 Isolation curtains with tie downs | 2 3-panel zippered end doors with Velcro straps |
| 1 Active curtain with integrated water booms and nozzles | 1 Ground cloth |
| 1 Interior catch basin | 1 Anchor kit |
| 2 Zippered clothing ports per side | 1 Repair kit |
| 1 6" diameter snorkeled port per side | 1 Hose adapter kit |
| | 1 Transport bag |

SHELTER SYSTEM INCLUDES:

Part Number: SYS-2 Line 8-20-1

Includes all shelter-only items, plus . . .

- 1 Water heater
- 2 Water hoses
- 4 Hand sprayers
- 1 Waste water pump
- 2 Light fixtures
- 2 Litter conveyor
- 2 Transfer board
- 6 Floor risers
- 1 Shower maintenance kit



3-LINE DECONTAMINATION SHELTER

The 3-line decontamination shelter provides a secure decontaminable area for effectively decontaminating both ambulatory and non-ambulatory casualties within the same compact footprint.

KEY FEATURES

External articulating frame and general durability

The patented external articulating frame is constructed from corrosion-resistant anodized aluminum. The shelter's design facilitates rapid deployment and can operate with 30% of the frame missing or broken.

Fire/chemical-resistant fabric

The shelter has UV-stable, fire retardant, and chemical-resistant fabric on the interior. It provides durability, protects exterior frame from contaminants, and expedites post-use clean-up.

Easy storage with a small stowed footprint

Stores to 45" x 45" x 45". Space efficient for facilities with limited space.

Three decon lines for added efficiency and privacy

Separates into three decon

lines. It enables patient privacy for male and female patients; added lane for non-ambulatory.

Patented corrosion-resistant anodized aluminum frame

A patented, corrosion-resistant anodized aluminum frame with chemical-resistant fabric provides long life and reliability.

Interior basin

The interior basin keeps all wastewater within the wash/rinse area of the shelter.

360° on/off shower nozzles

On/Off-capable shower nozzles on the interior of the shelter saturate patients with 360° of spray. They maintain system integrity and maximize decontamination capability. The nozzles can easily turn on or off for the user's specific needs.



3-LINE SHELTER	
Part Number	SD3-UZA08-GZ (Shelter only)
NSN	8340-01-618-8769
Part Number	SYS-3 Line 11-20-1 (System)
NSN	6665-01-564-1833
See index for a complete listing of part numbers.	
Exterior Fabric	White thermal screen
Interior Fabric	Yellow exterior White interior w/skylight
Interior Dimensions	19'6" L x 10'9" W x 8' H (5.9 x 3.3 x 2.4 m)
Shelter Stored Cube	3'9" x 3'9" x 3'9" (1.14 x 1.14 x 1.14 m)
Shelter Weight	215 lb (97.52 kg)
Shipping Weight	358 lb (162.39 kg)
Water Booms	2
Body Sprays	20 total at 0.4 GPM each
Quick Connects for Hand Wands	4

SHELTER ONLY INCLUDES:

Part Number: SD3-UZA08-GZ


- | | |
|---|---|
| 2 Active curtains with integrated water booms and nozzles | 1 14"-diameter snorkeled port per side |
| 2 Isolation curtains with tie downs | 2 5-panel zippered end doors with Velcro straps |
| 4 Privacy curtains | 1 Ground cloth |
| 1 Interior catch basin | 1 Anchor kit |
| 2 Zippered clothing ports per side | 1 Repair kit |
| 1 6"-diameter snorkeled port per side | 1 Hose adapter kit |
| | 1 Transport bag |

SHELTER SYSTEM INCLUDES:

Part Number: SYS-3 Line 11-20-1

Includes all shelter-only items, plus . . .

- 1 Water heater
- 2 Water hoses
- 4 Hand sprayers
- 1 Waste water pump
- 2 Light fixtures
- 2 Litter conveyor
- 2 Transfer board
- 8 Floor risers
- 1 Shower maintenance kit

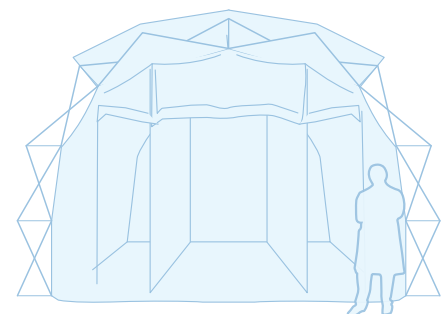

4-LINE DECONTAMINATION SHELTER

The 4-line decontamination shelter provides a secure decontaminable area for the effective decontamination of both ambulatory and non-ambulatory casualties within the same compact footprint.



KEY FEATURES

External articulating frame and general durability

The patented external articulating frame includes corrosion-resistant anodized aluminum. The shelter's design facilitates rapid deployment and can operate with 30% of the frame missing or broken.

Fire/chemical-resistant fabric

The shelter has UV-stable, fire retardant and chemical-resistant fabric on the interior. It provides durability, protects the exterior frame from contaminants, and expedites post-use clean-up.

Easy storage with small stowed footprint

Stores to 45" x 45" x 45". Space efficient for facilities with limited space.

High efficiency and privacy

Four decon lines provide higher efficiency and enable privacy for male and female patients. Shelter has the ability

to convert to both ambulatory and non-ambulatory care.

Patented corrosion-resistant anodized aluminum frame

A patented, corrosion-resistant anodized aluminum frame with chemical-resistant fabric provides long life and reliability.

Interior basin

The interior basin keeps all wastewater within the wash/rinse area of the shelter.

360° on/off shower nozzles

The On/Off-capable shower nozzles on the interior of the shelter saturate patients with 360° of spray. They maintain system integrity and maximize decontamination capability. The nozzles can easily turn on or off for the user's specific needs.

4-LINE SHELTER	
Part Number	SD4-WxA08-GZ (Shelter only)
NSN	5411-01-597-5570
Part Number	SYS-SD4-WxA08-GZ (System)
NSN	4240-01-641-4350
See index for a complete listing of part numbers.	
Exterior Fabric	White thermal screen
Interior Fabric	Yellow or tan exterior White interior w/skylight
Interior Dimensions	19'5" L x 16" W x 9'5" H (5.8 x 4.9 x 2.9 m)
Shelter Stored Cube	3'9" x 3'9" x 3'9" (1.14 x 1.14 x 1.14 m)
Shelter Weight	285 lb (129.27 kg)
Shipping Weight	375 lb (170.1 kg)
Water Booms	2
Body Sprays	36 total (8 on/off) at 0.4 GPM each
Quick Connects for Hand Wands	4
Active Curtains	3

SHELTER ONLY INCLUDES:

Part Number: SD4-WxA08-GZ


- | | |
|---|---|
| 6 Isolation curtains with tie downs | 2 Zippered side ports for clothing pass through |
| 3 Active curtains with integrated water booms and nozzles | 4 14" diameter snorkeled ports for HVAC |
| 1 Interior catch basin | 5 2 5-panel zippered end doors with Velcro strips |
| 2 6" diameter ports for accessory cords | 1 Ground cloth |
| 2 6" diameter ports for waste water hoses | 1 Anchor kit |
| | 1 Repair kit |
| | 1 Hose adapter kit |
| | 1 Transport bag |

SHELTER SYSTEM INCLUDES:

Part Number: SYS-SD4-WxA08-GZ

Includes all shelter-only items, plus . . .

- 1 Water heater
- 2 Water hoses
- 4 Hand sprayers
- 2 Waste water pump
- 4 Light fixtures
- 6 Litter conveyor
- 4 Transfer board
- 20 Floor risers
- 1 Shower maintenance kit

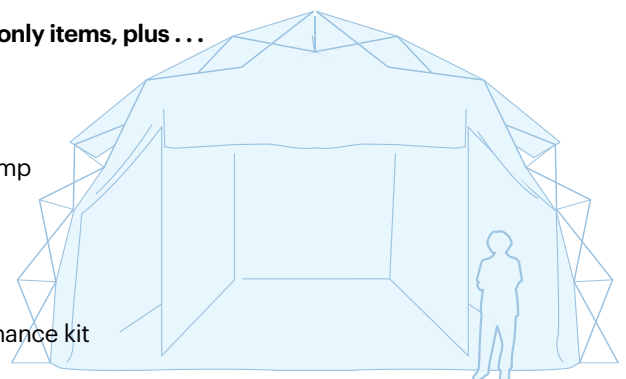

GENERAL PURPOSE

The prefabricated design ensures state-of-the-art performance, reliability, and speed of deployment and breakdown. With multiple options, there is a solution that meets almost any need.

COMMAND POST SHELTER

A lightweight, rapidly deployable shelter designed to deliver immediate protection for command and control, communication, triage, or comfort in extreme conditions.



KEY FEATURES

Pre-fabricated design

The pre-fabricated design ensures state-of-the-art performance, reliability, and speed of deployment.

Ample room for equipment

The exterior canopy configuration allows the frame to be on the inside and provides ample area to hang equipment.

Long life and reliability

Corrosion-resistant anodized patented aluminum frame with chemical-resistant fabric provides long life and reliability.

Deployed in less than two minutes

The reinforced metal frame is light yet sturdy. Two people can carry and deploy it in less than two minutes.

Compact footprint and lightweight

Collapses into a 2.5 foot cube for easy storage and transport.

Ensured continuity of operations


Comes with a repair kit and an anchor kit. It can be repaired if required while deployed, ensuring continuity of operations.

COMMAND POST SHELTER

Part Number	SCP-TZB04-Z*	SCP-TZB05-Z*	SCP-TZB06-Z*
Size	Small	Medium	Large
Exterior Fabric	*Color codes: E = White G = Yellow K = Blue N = Tan Y = Grey		
Interior Fabric	None		
Nominal Size	10' L x 8' W x 7'3" H (3.0 x 2.4 x 2.2 m)	12'6" L x 8' W x 7'3" H (3.8 x 2.4 x 2.2 m)	14'11" L x 8' W x 7'3" H (4.5 x 2.4 x 2.2 m)
Shelter Stored Cube	2'6" x 2'6" x 2'6" (0.76 x 0.76 x 0.76 m)	2'8" x 2'8" x 2'8" (0.81 x 0.81 x 0.81 m)	2'10" x 2'10" x 2'10" (0.86 x 0.86 x 0.86 m)
Shelter Weight	72 lb (32.66 kg)	90 lb (40.82 kg)	108 lb (48.99 kg)
Shipping Weight	190 lb (86.18 kg)	194 lb (88.00 kg)	204 lb (92.53 kg)
Window & Door Pattern	Zippered end doors		

SHELTER INCLUDES:

- 2 14" diameter snorkeled port per side
- 3 Paneled zippered end doors with Velcro straps
- 1 Ground cloth
- 1 Anchor kit
- 1 Repair kit
- 1 Transport bag



FIRST RESPONSE SHELTER

A larger version of our Command Post Shelter, the First Response Shelter provides protection for triage, against extreme weather, or for temporary lodging.



KEY FEATURES

Pre-fabricated design

The pre-fabricated design ensures state-of-the-art performance, reliability, and speed of deployment.

Ample room for equipment

The exterior canopy configuration allows the frame to be on the inside and provides ample area to hang equipment.

Excellent ambient light and ventilation

Full-length screened side windows provide ambient light and warm-weather ventilation.

Long life and reliability

The corrosion-resistant anodized patented aluminum frame with chemical-resistant fabric provides long life and reliability.

Deployed in less than two minutes

The reinforced metal frame is light yet sturdy. Two people can carry and deploy it in less than two minutes.

Lightweight, compact, and extremely portable

Collapses into a 28 inch cube, a small footprint for storage and transport.


Ensured continuity of operations

Comes with a repair kit and an anchor kit. It can be repaired if required while deployed, ensuring continuity of operations.

FIRST RESPONSE SHELTER			
Part Number	SFR-UZA05-Z*	SFR-UZA06-Z*	SFR-UZA08-Z*
Exterior Fabric	*Color codes: E = White G = Yellow K = Blue N = Tan Y = Grey		
Interior Fabric	None		
Nominal Size	12'3" L x 10'9" W x 8' H (3.7 x 3.3 x 2.4 m)	14'8" L x 10'9" W x 8' H (4.5 x 3.3 x 2.4 m)	19'6" L x 10'9" W x 8' H (5.9 x 3.3 x 2.4 m)
Shelter Stored Cube	2'4" x 2'4" x 2'4" (0.71 x 0.71 x 0.71 m)	2'9" x 2'9" x 2'9" (0.84 x 0.84 x 0.84 m)	3'2" x 3'2" x 3'2" (0.97 x 0.97 x 0.97 m)
Shelter Weight	135 lb (61.24 kg)	152 lb (68.95 kg)	206 lb (93.44 kg)
Shipping Weight	220 lb (99.79 kg)	245 lb (111.13 kg)	290 lb (131.54 kg)
Window & Door Pattern	Full length screened windows and zippered end doors		

SHELTER INCLUDES:

- 2 14" diameter snorkeled port per side
- 2 Paneled zippered end doors with Velcro straps
- 1 Ground cloth
- 1 Anchor kit
- 1 Repair kit
- 1 Transport bag

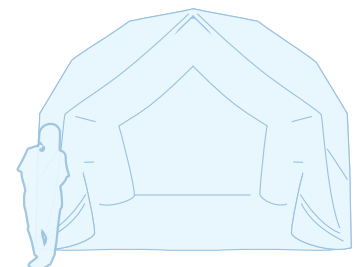

CASUALTY MANAGEMENT SHELTER

This large, multi-use shelter is ideal for mass casualty care, command and control, triage, rehab, billeting, and equipment storage.



KEY FEATURES

Pre-fabricated design

The pre-fabricated design ensures state-of-the-art performance, reliability, and speed of deployment and breakdown.

Exposed interior articulating frame

An exposed interior articulating frame maximizes hanging equipment.

Corrosion/chemical resistance and general durability

The patented corrosion-resistant anodized aluminum frame with chemical-resistant fabric provides long life and reliability.

Compact tent footprint and lightweight design

The compact footprint and lightweight design ensure an easy three-person deployment within three minutes under any conditions.


Screened side windows

Collapses into a 38 inch cube for easy storage and transport.

CASUALTY MANAGEMENT SHELTER			
Part Number Size	SCM-WxA07-Z* Small	SCM-WxA09-Z* Medium	SCM-WxA10-Z* Large
Exterior Fabric	*Color codes: E = White G = Yellow K = Blue N = Tan Y = Grey		
Interior Fabric	None		
Nominal Size	17'1" L x 16' W x 9'5" H (5.2 x 4.9 x 2.9 m)	21'4" L x 16' W x 9'5" H (6.5 x 4.9 x 2.9 m)	23'9" L x 16' W x 10'3" H (7.2 x 4.9 x 2.9 m)
Shelter Stored Cube	3'2" x 3'2" x 3'2" (0.97 x 0.97 x 0.97 m)	3'8" x 3'8" x 3'8" (1.17 x 1.17 x 1.17 m)	5'5" x 5'5" x 5'5" (1.35 x 1.35 x 1.35 m)
Shelter Weight	159 lb (72.12 kg)	198 lb (89.81 kg)	246 lb (111.58 kg)
Shipping Weight	372 lb (168.74 kg)	465 lb (210.92 kg)	512 lb (232.24 kg)
Window and Door Pattern	Long side screened window, 1 side door per side, zippered end doors w/tie-backs		

SHELTER INCLUDES:

- 2 14"-diameter snorkeled port per side
- 2 Paneled zippered end doors with Velcro straps
- 1 Ground cloth
- 1 Anchor kit
- 1 Repair kit
- 1 Transport bag
- 2 Push poles, 60" L

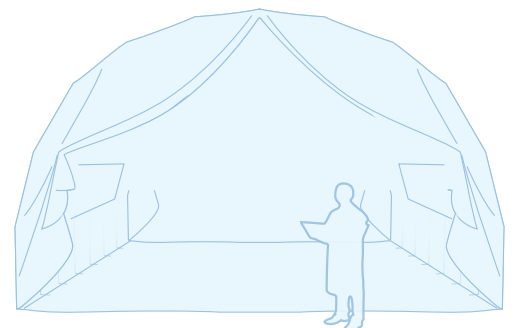

S-FRAME SHELTER

A very large, modular multi-use shelter that provides 420 square feet of usable space. It can be complexed together to form even larger structures. Ideal for hospital use, rehabilitation, or storage.

KEY FEATURES

Patented articulating frame

The patented articulating frame is made of corrosion-resistant anodized aluminum. The shelter's design facilitates rapid deployment and can operate with 30% of the frame missing or broken.

Durable outer canopy

The outer canopy is secured to the frame. It is water, chemical, flame and fungus resistant to provide long life.

Inner fabric liner

The Inner fabric liner is affixed to the articulating frame and includes a removable affixed plenum to the side of the liner.

HVAC port

An HVAC port is provided in the fabric liner inside the lower end of the plenum to which an HVAC supply duct would be attached. The plenum directs the HVAC air-flow up to the top of the shelter.

Two doors and side windows

The shelter has a door in the middle of both shelter end walls and side window openings with covers and screens for ample warm-weather ventilation.

Snorkeled ports


Snorkeled ports connect ducts from optional HVAC equipment for climate control. Snorkeled ports also provide entry for optional power cables for lighting and other optional equipment requiring electrical power.



S-FRAME SHELTER	
Part Number	SUR-SZA09-EY
Exterior Fabric	Grey
Interior Fabric	White
Interior Shelter Dimensions	21' L x 20' W x 10' H (6.4 x 6.1 x 3.0 m)
Exterior Shelter Dimensions	23' L x 22' W x 12' H (7.01 x 6.71 x 3.66 m)
Shelter Stored Cube	4' x 4' x 4' (1.93 x 1.93 x 1.93 m)
Shelter/Ground Cloth/ Push Poles Weight	486 lb (220.45 kg)
Shipping Weight	615 lb (278.96 kg)

SHELTER INCLUDES:

- 2 Push poles, 60" L
- 1 Ground cloth
- 1 Anchor kit
- 1 Repair kit
- 1 Transport bag

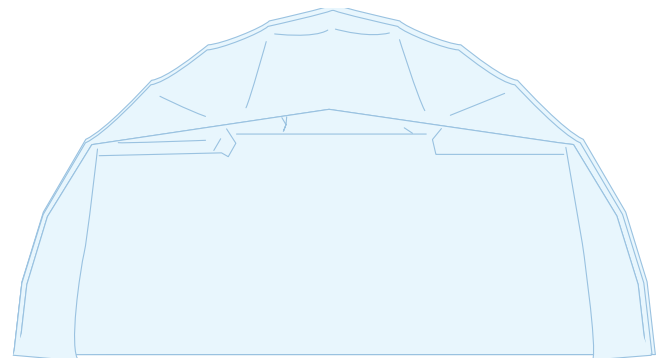

VEHICLE TOPPER

The vehicle topper provides a clear span interior measuring 11' wide by 8' high. It serves as a cover from the outdoor elements during a car seat check. The vehicle topper can also be customized to display a banner with the agency's name/logo.



FEATURES & BENEFITS

- Patented articulating frame with corrosion-resistant anodized aluminum.
- Maximum utility and flexibility.
- Collapsible and lightweight.
- Easy to transport and store.
- Deployable by two people in under one minute.
- Optional removable doors (set of two).
- Optional canvas storage bag, gray.

TOPPERS INCLUDES:

- 1 Anchor kit
- 1 Repair kit
- 1 Hardware kit
- 1 Transport bag, nylon
- 4 25-lb sandbags
- 4 Custom banners

VEHICLE TOPPER	
Part Number	STP-UB04-Z*
Part Number	STP-UB04-Z*-0009 (with banners)
Exterior Fabric	*Color codes: G = Yellow K = Blue E = White
Shelter Dimensions	9'8" L x 10'9" W x 8' H (2.95 x 3.28 x 2.44 m)
Topper Stored Cube	30" L x 15" W x 34" H (0.76 x 0.38 x 0.86 m)
Shelter Weight	66 lb (29.94 kg)
Shipping Weight	170 lb (77.11 kg)

BODY SCENE AND FORENSICS SHIELD

The Body Scene and Forensics Shield provides added security and safety. It prevents the public and media from viewing and photographing the crime scene and adds a level of professionalism and respect for the victims. Use at crime scenes, vehicle crashes, or during evidence collection.



FEATURES & BENEFITS

- Compact and portable. Will fit in a police vehicle.
- Velcro to attach an optional banner (i.e, Department Seal, Name, etc.).
- Provides room to work and examine the body and scene.
- Transport bag.
- Full length screened side windows provide ambient light and warm-weather ventilation.
- Can be easily decontaminated.

BODY SCENE & FORENSICS SHIELD			
Part Number	LBS-04-05-K	LBS-04-10-K	LBS-06-12-K
Overview	Short profile	Low profile	High profile
Frame	Black	Black	Black
Exterior Fabric	Blue w/white canopy	Blue w/white canopy	Blue w/white canopy
Nominal Size	4' 3" Dia x 4' H (1.30 m Dia x 1.23 m H)	8' 6" Dia x 4' H (2.59 m Dia x 1.23 m H)	11' Dia x 6' H (3.35 m Dia x 1.83 m H)
Stored Cube	46.5" x 5" x 10" (1.18 x 0.13 x 0.25 m)	35" x 9" x 25" (0.89 x 0.23 x 0.64 m)	38" x 11" x 31" (3.51 x 0.28 x 0.79 m)
Shield Weight	8 lb (3.63 kg)	25 lb (11.34 kg)	50 lb (22.68 kg)
Shipping Weight	15 lb (6.80 kg)	37 lb (16.78 kg)	65 lb (29.48 kg)

SHELTER SYSTEMS ACCESSORIES

External Hazmat Basin	13
Internal Containment Basin	13
Waste Storage Bladder	14
Air Heater - Diesel Indirect Fired	14
Flash Water Heater	15
Light Fixture	16
Waste Water Pump	17
Hand Truck and Transport Cart	17
Anchoring Options	18
Litter Conveyor and Board	19
Portable Bench	20
Portable Drafting Table	20

EXTERNAL HAZMAT BASIN

Highly chemical-resistant 30 oz PVC coated fabric basins capture bio-hazard and wastewater runoff from patient care operations within ADG decontamination shelters.

FEATURES & BENEFITS

- 30 oz PVC coated fabric material is highly resistant to chemicals, and is mold and mildew resistant
- Valved drain port for subsequent disposal of the contained fluid. Quick disconnect connector.
- Compact and lightweight for portability. Fully collapsible, requires less storage space, and comes with a transport bag.
- Quickly and easily deploys in less than 30 seconds and requires no tools. Reusable and repairable.



EXTERNAL HAZMAT BASIN			
Part Number	NSN	Dimensions	
HMB-36-36-0	4235-01-591-2439	3' L x 3' W x 1' H	(0.91 x 0.91 x 0.30 m)
HMB-45-45-0		3'9" L x 3'9" W x 1' H	(1.14 x 1.14 x 0.30 m)
HMB-55-55-0		4'7" L x 4'7" W x 1' H	(1.40 x 1.40 x 0.30 m)
HMB-48-96-0	4235-01-603-7720	4' L x 8' W x 1' H	(1.22 x 2.44 x 0.30 m)
HMB-72-96-0		6' L x 8' W x 1' H	(1.83 x 2.44 x 0.30 m)
HMB-96-96-0		8' L x 8' W x 1' H	(2.44 x 2.44 x 0.30 m)

INTERNAL CONTAINMENT BASIN

PVC-coated polyester basin captures biohazard and waste-water runoff from infection control operations with ADG decontamination shelters.

FEATURES & BENEFITS

- Pre-fabricated design with patented articulating frame provides speed of deployment, state-of-the-art performance and reliability.
- Valve drain port for subsequent disposal of contained fluid
Quick disconnect connector
Drain to a containment bladder.
- Quickly and easily deploys, deploys in less than 30 seconds, and no tools required.



INTERNAL CONTAINMENT BASIN			
Part Number	HDB-TZ-04-I-01	HDB-UZ-04-I-01	HDB-WZ-04-I-01
Exterior Dimensions	10' L x 8' W (3.05 x 2.44 m)	10' L x 10' W (3.05 x 3.05 m)	16' L x 10' W (4.88 x 3.05 m)
Description	2-line, heavy duty basin with bag	3-line, heavy duty basin with bag	4-line, heavy duty basin with bag
Fabric Liner	PVC coated polyester	PVC coated polyester	PVC coated polyester
Number of drains	2	2	2

WASTE STORAGE BLADDER

Chemical-resistant copolymer waste storage bladder effectively collects wastewater runoff from AirBoss decontamination shelters.



FEATURES & BENEFITS

- Copolymer material is highly resistant to chemicals and is mold and mildew resistant.
- Integral pressure relief valve, ball valve, backflow prevention valve, and camlock. Ball valve on either side of camlock for shut off, backflow prevention for one-way fluid exchange, camlock for quick disconnect.
- Rugged design allows for use in the harshest environments.
- Quickly and easily deploys, no tools required, reusable and repairable.
- Compact and lightweight for portability, fully collapsible, and foldable. Less storage space is required. Protective ground cloth and transport bag included.

WASTE STORAGE BLADDER w/BACK FLOW PREVENTER		
Part Number	Storage Volume	
WSB-100G	100 gallons	(379 liters)
WSB-250G	250 gallons	(946 liters)
WSB-500G	500 gallons	(1,893 liters)
WSB-1000G	1,000 gallons	(3,785 liters)
WSB-1500G	1,500 gallons	(5,678 liters)
WSB-2000G	2,000 gallons	(7,571 liters)

AIR HEATER – DIESEL INDIRECT FIRED

A portable and rugged diesel indirect-fired air heater that offers a large tank capacity for hours of continuous operation.



FEATURES & BENEFITS

- Heat exchanger keeps heated air separate from the exhaust gas.
- High static pressure capability from powerful fans allows heater placement out-of-doors for clean, heated air directed indoors.
- Includes automatic safety and control devices, along with built-in water-resistant electronic flame control box.
- Stainless steel combustion chamber with durable powder-coated finish ensures long life and reliability.
- Heavy-duty wheels and handle offer ease of mobility, and the chained twist-lock fuel cap ensures unit efficiency and integrity.
- Includes new HD duct adapter and two-stage pump for increased reliability in sub-zero temperature startup and operations.
- Optional ducting available for the direction of clean, heated airflow.
- Optional thermostat available for constant control of air temperature.

AIR HEATER	
Part Number	AH-122-15
Dimensions	48.62" L x 22.63" W x 39.37" H (1.24 x 0.58 x 1.00 m)
Weight	135 lb (61.24 kg)
Shipping Weight	167 lb (75.75 kg)
Tank Capacity	17 gallons (45.04 liters)
Fuel Types	K-1 kerosene, diesel #1 or #2
Fuel Consumption	0.65 gal/hr (3.07 liter / hr)
BTU Rating	122,000 BTU
CFM Output	1060 CFM
Power Required	120 V / 60 Hz / 7.5 AMP

AIR HEATER INCLUDES:

- 1 12" x 15' ducting hose
- 1 12" heater duct adapter

FLASH WATER HEATER

The portable flash water heater is the perfect solution for the supply of instant hot water. The diesel-fired heater increases water temperature by 40 degrees in 30 seconds and provides warm water showers and hand-washing capabilities. Its stainless steel construction is non-corrosive to provide years of reliable service.



FEATURES & BENEFITS

- Dosatron mixer injects pre-set percent solution to provide emulsifying wash.
- Electronic ignition provides reliable starting in all conditions.
- Man-portable with turf tires and guide handles.
- Thermostatic temperature valve allows easy manipulation of water temperature.
- In-line water filter effectively removes sediment and other debris from the input water.
- Multiple outputs allow for the operation of up to two shelters from one heater.
- Five gallons of diesel fuel can provide up to two hours of continuous operation.
- Camlock fittings provide easy hook-up by suited technicians.
- Pressure reduction valve prevents system damage from high-pressure inputs.
- Dimensions 41" L x 30" W x 35-1/2" H (104 x 76 x 90 cm).

FLASH WATER HEATER	180K WITHOUT INJECTION	340K WITHOUT INJECTION	340K WITH INJECTION	500K WITHOUT INJECTION	500K WITH INJECTION
Part Number	WH-180-4-0	WH-340-0-1	WH-340-1-1	WH-500-5-0	WH-500-2-1
NSN					4520-01-600-8579
TECHNICAL SPECIFICATIONS					
Water Flow (GPM)	6	11	11	16	16
Heat Rise (°F) <i>(see note below)</i>	40°	37°	37°	41°	41°
Water Inlet	3/4" garden hose	1 1/2" NPT	1 1/2" NPT	1 1/2" NPT	1 1/2" NPT
Number of Inlets	1	1	1	4	4
Water Outlet	3/4" camlock	3/4" camlock	3/4" camlock	3/4" camlock	3/4" camlock
Number of Outlets	1	4	4	4	4
BURNER					
Vertical Chamber Height	21.5"	20.5"	20.5"	27"	27"
Heat Chamber Outlet	7"	7"	7"	7"	7"
BTU's Input	180,000	340,000	340,000	500,000	500,000
Removable Fuel Filter	Yes	Yes	Yes	Yes	Yes
Fuel <i>(recommended)</i>	No. 2 diesel	No. 2 diesel	No. 2 diesel	No. 2 diesel	No. 2 diesel
Fuel <i>(not recommended)</i> <i>(see note below)</i>	No. 1 diesel, kerosene, or JP	No. 1 diesel, kerosene, or JP	No. 1 diesel, kerosene, or JP	No. 1 diesel, kerosene, or JP	No. 1 diesel, kerosene, or JP
Fuel Capacity	7.4 gallons	5.3 gallons	5.3 gallons	5.3 gallons	5.3 gallons
ELECTRICAL					
Voltage	115	115	115	115	115
Phase	1	1	1	1	1
Cycle	60 Hz	60 Hz	60 Hz	61 Hz	61 Hz
Weight	210 lb	360 lb	360 lb	390 lb	390 lb
	40° heat rise base on 58° incoming water temp. @ 6 GPM	37° heat rise base on 58° incoming water temp. @ 11 GPM	37° heat rise base on 58° incoming water temp. @ 11 GPM	41° heat rise base on 58° incoming water temp. @ 16 GPM	41° heat rise base on 58° incoming water temp. @ 16 GPM
NOTE: Heater performance may be "compromised" with the use of No. 1 diesel, kerosene, or JP					

FLASH WATER HEATER (CONTINUED)

WATER HEATER INCLUDES:

- 1 Diesel-fired flash heater
- 1 Dosatron Solution Injection System (not included with WH-180-4-0 or WH-340-0-1)
- 4 Hose outputs
 - 2 mixed with solution
 - 2 with clear water
- 1 Hydrant-compatible input
- 1 Garden hose adapter
- 1 Close loop temperature control with maximum temperature shut-off
- 2 Turf tires and guide handles
- 1 Pressure-reduction valve
- 1 Temperature-control valve
- 1 In-line water filter
- 1 Electronic ignition
- 1 Clean out tube
- 1 In-line GFI
- 1 100' 12AWG extension cord

ADDITIONAL ACCESSORIES (Sold separately)

- HW-D20B-.75-CFCF (nylon F-F camlocks, 3/4" x 20', blue)
- HW-D20C-.75-CFCF (nylon F-F camlocks, 3/4" x 20', red)
- HW-D50B-.75-CFCF (nylon F-F camlocks, 3/4" x 50', blue)
- HW-D50C-.75-CFCF (nylon F-F camlocks, 3/4" x 50', red)

LIGHT FIXTURE

A portable and rugged lighting fixture perfect for your ADG shelter when used during incident management operations.

FEATURES & BENEFITS

- Dual-frequency
- 50/60W, 120VAC fluorescent light
- Constructed from heavy-duty plastic shield
- Connectors included for hanging lights in series
- 15' black SJOW cord

Fixture includes:

- NEMA 4X watertight connector and plug
- Hanging hooks

Fixture Kit includes:

- Hanging Straps
- 4 Light Fixtures with standard connector and plug in case



LIGHT FIXTURE	
Part Number	LF-50-1-0008 (Fixture only)
Part Number	LF-50-4-KIT (Fixture kit)
Bulb Type	Fluorescent
Watts/Voltage	50/60 W, 120 VAC
Bulb	Single
Water Resistant	Yes
Weight	4.5 lb (2.04 kg)

WASTE WATER PUMP

The waste water pump allows the user to move water from open containment in the shelter into a bladder.

FEATURES & BENEFITS


- Moves wastewater efficiently while protecting people and the environment.
- GFCI helps protect people.
- Less electrocution risk.
- Wide base makes the pump very stable.
- Safety in high-volume situations.
- 30 GPM max capacity.



WATER PUMP	
Part Number	WP-30-S
NSN	4630-01-593-3149
Dimensions	10" D x 8" H (25.4 x 20.3 cm)
Power Cord	7'
Water Hose	3/4" D x 10' L (1.9 x 25.4 cm)
Motor Power	1/4 HP
Voltage	110 V
GFCI Adapter	Included
Transport Bag	Included

HAND TRUCK AND TRANSPORT CART

Hand truck for the transport of shelters and accessories. Transport cart and platform truck for transport of decontamination kits.

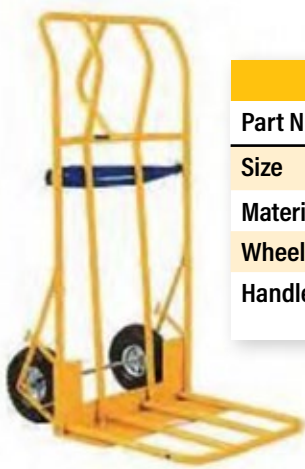

HAND TRUCK	
Part Number	HT-01
Size	26" W x 21" D x 52" H (0.66 x 0.53 x 1.32 m)
Material	Steel
Wheels	10" x 4" pneumatic (25.4 x 10.2 cm)
Handle	P-handle for easy one-hand operation when going through gates or doors

TRANSPORT CART	
Part Number	HT-36-72
Size	36" x 72" (0.91 x 1.83 m)
Material	Steel platform flush
Wheels	12" x 3.5" pneumatic (30.5 x 8.9 cm)
Handle	T-handle for easy one-hand operation

PLATFORM TRUCK	
Part Number	HT-36-72-01
Size	36" x 72" (0.91 x 1.83 m)
Material	Steel platform painted blue
Casters	All swivel, foam-filled, 10" diameter; 2 casters have swivel locks to allow straight tracking when pushed
Handle	One on each end and two on each side, all removable; all have cross bars

ANCHORING OPTIONS (WITHOUT STAKES)

Emergency first responders can utilize standard anchoring systems with stakes and guidelines provided with each shelter. When stakes cannot be driven into the ground, ADG provides two anchoring options.

CUSTOM MADE SAND BAGS

- Heavy duty canvas with webbed carrying handle
- Designed to fit over scissor struts without placing additional pressure on the struts
- Each bag weighs 25 pounds

ANCHORING SAND BAGS	
Part Number	X-SB-0
Quantity	Set of 4
Weight	25 lb each



PORTABLE WATER BLADDERS

- Lightweight and easy to transport
- Can be filled with a standard water hose
- Holds 7.3 gallons of water
- Weighs 65 pounds when full

ANCHORING WATER BLADDERS	
Part Number	WB-60-06-V-A
Dimensions	5' L x 6" W (13 x 15 cm)
Color	Black




LITTER CONVEYOR AND BOARD

The expandable litter conveyor system is lightweight and man-portable to ensure readiness when accepting non-ambulatory patients into any decontamination system.

FEATURES & BENEFITS

- Litter Conveyor utilizes ADG's patented articulating frame to provide rapid deployment of the conveyor to transport non-ambulatory casualties.
- Weight capacity of 275 pounds provides a solid foundation for transporting patients.
- Transfer/conveyor board (sold separately) utilizes guide system.
- Self-lubricating, non-corrosive rollers provide years of reliable use.
- Velcro "tongue" system links sections together and customizes the system to any length.
- Scissor-frame technology allows the conveyor to straddle any containment basin sidewall so that decontamination can take place and wastewater is captured.
- Made from anodized aluminum and stainless steel hardware to withstand contaminants.
- Open frame and slotted transfer board allow for easy flow-through of contaminated water.
- Includes nylon stabilizer straps, one stabilizer plate, Velcro connection straps on each end, and transport bag.

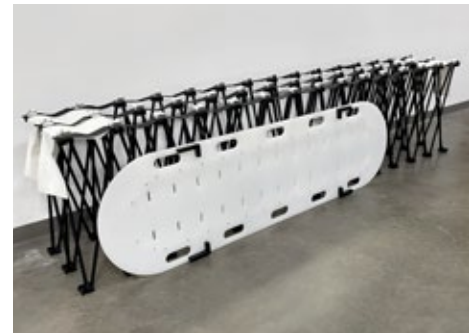

Part Number	LITTER CONVEYOR				CONVEYOR BOARD
	LC-1808-X	LC-1810-X	LC-1812-X	LC-1816-X	LCA-B
Length	8' (2.44 m)	10' (3.05 m)	12' (3.66 m)	16' (4.88 m)	7' (2.13 m)
Shipping Weight	50 lb (22.68 kg)	62 lb (28.12 kg)	70 lb (31.75 kg)	85 lb (38.56 kg)	24 lb (10.88 kg)
Packed Size	9" W x 38" L x 34" H (0.23 x 0.97 x 0.86 m)	9" W x 38" L x 34" H (0.23 x 0.97 x 0.86 m)	9" W x 43" L x 34" H (0.23 x 1.09 x 0.86 m)	9" W x 60" L x 34" H (0.23 x 1.52 x 0.86 m)	24" W x 84" L x 2" H (0.61 x 2.13 x 0.05 m)
Deployed Size	18" W x 8' L x 30.25" H (0.46 x 2.44 x 0.77 m)	18" W x 10' L x 30.25" H (0.46 x 3.05 x 0.64 m)	18" W x 12' L x 30.25" H (0.46 x 3.66 x 0.64 m)	18" W x 16' L x 30.25" H (0.46 x 4.88 x 0.64 m)	24" W x 84" L x 0.38" H (0.61 x 2.13 x 0.01 m)

PORTABLE BENCH

This innovative portable bench is a lightweight and cost-effective solution for your seating needs. Manage your scene after decontamination with a staged seating area. Contain and coordinate in a calm environment while people await further direction.

FEATURES & BENEFITS

- Firefighters can walk out of a hot zone, then sit and rest with their packs on (no more marring the rig)
- Lightweight
- Non-slip fabric seat cover
- Patented articulating aluminum frame
- Heavy-duty weight capacity
- Easy store and carry
- Storage bag




PORTABLE BENCH	
Part Number	LBE-04-E
Fabric	White (non-slip)
Deployed Size	4' L x 1' 2-1/2" W x 2' H (1.22 x 0.37 x 0.61 m)
Stored Size	27" L x 8" W x 14" H (0.69 x 0.20 x 0.36 m)
Weight Capacity	600 lb (272.16 kg)
Bench Weight	16 lb (7.26 kg)
Shipping Weight	19 lb (8.62 kg)

PORTABLE DRAFTING TABLE

The portable drafting table provides a stable platform for holding laptops or creating crime scene diagrams and cataloging evidence at the scene.

FEATURES & BENEFITS

- Patented articulating aluminum frame
- Magnetic flashlight holder (flashlight not included)
- Collapses into a convenient carry and storage bag
- Stores to 27" x 27" x 6". Space efficient to carry in the trunk of any police vehicle
- Large pocket side bag will hold templates for diagramming
- The 11" x 14" magnetic dry erase tabletop is suitable for drafting
- 23" x 16" drawing surface provides a stable writing or drawing area



PORTABLE DRAFTING TABLE INCLUDES:

- 1 Magnetic flashlight holder (flashlight not included)
- 1 11" x 14" magnetic dry erase tabletop
- 1 23" x 16" drawing surface
- 1 Removable accessory bag (hooks to the side of the tabletop)
- 1 Transport bag w/shoulder straps and zippered pocket

PORTABLE DRAFTING TABLE	
Part Number	LCT-01
Deployed Size	2' L x 1' 6" W x 3' 5" H (61 x 46 x 104 cm)
Stored Cube	27" x 27" x 6" (69 x 69 x 15 cm)
Table Weight	12.5 lb (5.67 kg)
Shipping Weight	18 lb (8.16 kg)

SHELTER SYSTEMS

PART NUMBER INDEX

When placing an order, please refer to the part number information
in this index to ensure you receive the correct products.

DECONTAMINATION SHELTERS

Individual	22
2-Line	22
3-Line	22
4-Line	22

GENERAL PURPOSE SHELTERS

Command Post	22
First Response	22
Casualty Management	23
S-Frame	23
Vehicle Topper	23
Vehicle Topper Accessories	23
Body Scene and Forensics Shield	23

SHELTER ACCESSORIES

External Hazmat Basins	24
Internal Containment Basins	24
Bladders	24
Waste Storage Bladder	24
Potable Bladder	24
Air Heater	24
Flash Water Heater	25
Light Fixture	25
Waste Water Pump	25
Hand Truck	25
Transport Cart	25
Platform Truck	25
Anchoring Options	25
Litter Conveyor and Board	25
Portable Bench	26
Portable Drafting Table	26
General Shelter Repair Parts	26
Shelter Repair Kits	26
Replacement Strut Sets	26
Water and Plumbing	27
Miscellaneous Shelter Parts	27

SHELTER SYSTEMS

DECONTAMINATION SHELTERS

INDIVIDUAL DECON SHELTER		PAGE 3
Part Number	Description	
SD1-TTB02-GZ	Individual decon shelter, 5.25' L x 5.5' W	
SYS-Ind-10-13-1	Individual decon - 5.25' L x 5.5' W shelter system, includes various accessories	

2-LINE DECON SHELTER		PAGE 4
Part Number	Description	
SD2-TZB08-GZ	2-Line decon shelter, 20' L x 8' W	
SYS-2 Line 8-20-1	2-Line decon - 20' L x 8' W shelter system, includes various accessories	

3-LINE DECON SHELTER			PAGE 5
Part Number	NSN	Description	
SD3-UZA08-GZ	8340-01-618-8769	3-Line decon shelter, 20' L x 11' W	
SYS-3 Line 11-20-1	6665-01-564-1833	3-Line decon - 20' L x 11' W shelter system, includes various accessories	

4-LINE DECON SHELTER			PAGE 6
Part Number	NSN	Description	
SD4-WxA08-GZ	5411-01-597-5570	4-Line decon shelter, 19' L x 16' W	
SYS-SD4-WxA08-GZ	4240-01-641-4250	4-Line decon - 19' L x 16' W shelter system, includes various accessories	

GENERAL PURPOSE SHELTERS

COMMAND POST SHELTER		PAGE 7
Part Number	Description	
SCP-TZB04-Z*	Small, 10' L x 8' W x 7'3" H (3.0 x 2.4 x 2.2 m)	
SCP-TZB05-Z*	Medium, 12' 6" L x 8' W x 7'3" H (3.8 x 2.4 x 2.2 m)	
SCP-TZB06-Z*	Large, 14'11" L x 8' W x 7'3" H (4.5 x 2.4 x 2.2 m)	
* Exterior Fabric Color Codes:	E = White G = Yellow K = Blue N = Tan Y = Grey	

FIRST RESPONSE SHELTER		PAGE 8
Part Number	Description	
SFR-UZA05-Z*	Small, 12'3" L x 10'9" W x 8' H (3.7 x 3.3 x 2.4 m)	
SFR-UZA06-Z*-US	Berry compliant, medium, 14'8" L x 10'9" W x 8' H (4.5 x 3.3 x 2.4 m)	
SFR-UZA06-Z*	Medium, 14'8" L x 10'9" W x 8' H (4.5 x 3.3 x 2.4 m)	
SFR-UZA08-Z*	Large, 19'6" L x 10'9" W x 8' H (5.9 x 3.3 x 2.4 m)	
* Exterior Fabric Color Codes:	E = White G = Yellow K = Blue N = Tan Y = Grey	

CASUALTY MANAGEMENT SHELTER**PAGE 9**

Part Number	Description
SCM-WxA07-Z*	Small, 17'1" L x 16' W x 9'5" H (5.2 x 4.9 x 2.9 m)
SCM-WxA09-Z*	Medium, 21'4" L x 16' W x 9'5" H (6.5 x 4.9 x 2.9 m)
SCM-WxA10-Z*	Large, 23'9" L x 16' W x 10'3" H (7.2 x 4.9 x 2.9 m)
* Fabric Color Codes:	E = White G = Yellow K = Blue N = Tan Y = Grey

S-FRAME SHELTER**PAGE 10**

Part Number	Description
SUR-SZA09-EY	Multi-purpose S-frame shelter – 21' L x 20' W x 10' H (6.4 x 6.1 x 3.0 m)

VEHICLE TOPPER**PAGE 11**

Part Number	Description
STP-UB04-Z*	Clear span interior – includes (4) 25 lb ea. sandbags, repair kit, hardware kit, and anchor kit, choice of color*, 9'8" L x 10'9" W x 8' H
STP-UZB04-Z*-0009	Clear span interior – includes 4 custom banners, (4) 25 lb ea. sandbags, repair kit, hardware kit, and anchor kit, choice of color*, 9'8" L x 10'9" W x 8' H
* Fabric Color codes:	G = Yellow K = Blue E = White

VEHICLE TOPPER ACCESSORIES

Part Number	Item	Description
X-SB-0	Sand Bag	Set of 4, 25 lb ea., heavy duty black canvas with webbed handle
AK-CO-TPR	Anchor Kit, Topper	Includes 4 wind line assembly, 1 bag, 8-9" orange stakes
KIT-01-01-UBA	Repair Kit, Topper	Includes 1 strut with white spacer, 1 strut with red spacer, 1 strut with black spacer, 1 node, 4 shoulder bolts, tear aid tape, bolts, washers, 9" locking strap assembly, 1 bag
21S0022	Compression Strap	8' Compression Strap

BODY SCENE AND FORENSICS SHIELD**PAGE 11**

Part Number	Item	Description
LBS-04-05-K	Short Profile	Short, low-profile body shield – 4'3" D x 4' H
LBS-04-10-K	Low Profile	Standard low-profile body shield – 8'6" D x 4' H
LBS-06-12-K	High Profile	High-profile body shield – 11' D x 6' H

SHELTER ACCESSORIES

EXTERNAL HAZMAT BASINS

PAGE 13

Part Number	NSN	Description
HMB-36-36-0	4235-01-591-2439	3' L x 3' W x 1' H (0.91 x 0.91 x 0.30 m)
HMB-45-45-0	4235-01-603-7720	3'9" L x 3'9" W x 1' H (1.14 x 1.14 x 0.30 m)
HMB-55-55-0		4'7" L x 4'7" W x 1' H (1.40 x 1.40 x 0.30 m)
HMB-48-96-0		4' L x 8' W x 1' H (1.22 x 2.44 x 0.30 m)
HMB-72-96-0		6' L x 8' W x 1' H (1.83 x 2.44 x 0.30 m)
HMB-96-96-0		8' L x 8' W x 1' H (2.44 x 2.44 x 0.30 m)

INTERNAL CONTAINMENT BASINS

PAGE 13

Part Number	Item	Description
HDB-TT-02-I-01	Basin, Ind, TT	Basin, internal, individual
HDB-TZ-04-I-01	Basin, 2-Line, T8	Heavy duty, 10' L x 8' W, with bag
HDB-UZ-04-I-01	Basin, 3-Line, U8	Heavy duty, 10' L x 10' W, with bag
HDB-WZ-04-I-01	Basin, 4-Line, W8	Heavy duty, 16' L x 10' W, with bag

WASTE STORAGE BLADDER WITH BACK FLOW PREVENTION

PAGE 14

Part Number	Description
WSB-100G	100 gallons (379 liters)
WSB-250G	250 gallons (946 liters)
WSB-500G	500 gallons (1,893 liters)
WSB-1000G	1,000 gallons (3,785 liters)
WSB-1500G	1,500 gallons (5,678 liters)
WSB-2000G	2,000 gallons (7,571 liters)

POTABLE BLADDER

Part Number	Description
PSB-1500G	1,500 gallons (5,678 liters)

AIR HEATER - DIESEL INDIRECT FIRED

PAGE 14

Part Number	Description
AH-122-15	Forced air heater, multifuel, 122K BTU

FLASH WATER HEATER			PAGE 15
Part Number	NSN	Description	
WH-180-4-0		WH without injection system, 180K BTU	
WH-340-0-1		WH without injection system, 340K BTU	
WH-340-1-1		WH with injection system, 340K BTU	
WH-500-5-0		WH without injection system, 500K BTU	
WH-500-2-1	4520-01-600-8579	WH with injection system, 500K BTU	

LIGHT FIXTURE		PAGE 16
Part Number	Description	
LF-50-1-0008	Light fixture, 50w, 120v, 50-60hz, single bulb	
LF-50-4-KIT	(4) 50w each with hangers, case, outlet tower, 3-wire, GFCI	

WASTE WATER PUMP			PAGE 17
Part Number	NSN	Description	
WP-30-S	4630-01-593-3149	Submersible, 110v, 12 GPM rating when used with 10' hose, 1.2 AMPS @ 115v (less than a 1/4 horsepower), built-in pick-up foot, 10' hose and GFI	

HAND TRUCK		PAGE 17
Part Number	Description	
HT-01	Hand truck	

TRANSPORT CART		PAGE 17
Part Number	Description	
HT-36-72	Flat deck, 12" pneumatic wheels, gray, 2K lb capacity, 36" W x 72" L	

PLATFORM TRUCK		PAGE 17
Part Number	Description	
HT-36-72-01	Steel, blue, (4) removable rails, cross straps, swivel casters, foam filled, 10"D, (2) casters have swivel locks, 36" W x 72" L	

ANCHORING OPTIONS			WITHOUT STAKES	PAGE 18
Part Number	Item	Description		
X-SB-0	Anchoring sandbags	Set of 4, 25 lb ea., heavy duty black canvas with webbed handle		
WB-60-06-V-A	Anchoring water bladders	Portable water bladder anchor, black, 5' L x 6" W		

LITTER CONVEYOR AND BOARD		PAGE 19
Part Number	Description	
LC-1808-X	Litter conveyor – 18" W x 8' L	
LC-1810-X	Litter conveyor – 18" W x 10' L	
LC-1812-X	Litter conveyor – 18" W x 12' L	
LC-1816-X	Litter conveyor – 18" W x 16' L	
LCA-B	Litter conveyor transfer board – 24" W x 84" L	

PORTABLE BENCH**PAGE 20**

Part Number	Description
LBE-04-E	Portable bench – lightweight, non-slip fabric cover, 4' L x 14" W x 20" H

PORTABLE DRAFTING TABLE**PAGE 20**

Part Number	Description
LCT-01	Stable platform, large pockets, 48" H x 24" W

GENERAL SHELTER REPAIR PARTS

Part Number	Item	Description
70-R-0A10P	Hardware Set	2 bolts, 2 nuts, 4 flat washers, 40 lock washers, 4 fender washers
70-R-0A22	Tool Set	1 Ratchet tool socket, 1 socket hex head, 1 socket shoulder bolt, 1 wrench hex head
70-R-0A30	Patch Kit	5 Repair aid tape – 3" W x 8" L
70-R-0A51	Node Set	10 Nodes, 40 shoulder bolts
70-R-0A55	Hanger Loops	10 Ring bolts
70-R-0A57	Locking Straps	2 Locking straps, red, with becket/buckle

SHELTER REPAIR KITS Each kit contains – (1) 1/4" ratchet, (1) 7/16" combo wrench, (1) 7/64" hexbit socket, (1) 7/16" socket

Part Number	Description
KIT-01-01-TTA	TT-frame (Individual) – 2 strut with white spacer, 2 strut with red spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag
KIT-01-01-TZA	T-frame (2-Line) – 2 strut with white spacer, 2 strut with purple spacer, 2 strut with tan spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag
KIT-01-01-UZ	U-frame (3-Line) – 2 strut with white spacer, 2 strut with red spacer, 2 strut with black spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag
KIT-01-01-SZ	S-frame (S9) – 2 strut with white spacer, 2 strut with orange spacer, 2 strut with blue spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag
KIT-01-01-Wa	Wa-frame – 2 strut with white spacer, 2 strut with orange spacer, 2 strut with blue spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag
KIT-01-01-Wx	Wx-frame – 2 strut with orange spacer, 2 strut with blue spacer, 2 strut with yellow spacer, 2 nodes, 8 shoulder bolts, (1) 3" W x 8" L tear aid tape, bolts, washers, 2 buckle/becket, bag

REPLACEMENT STRUT SETS Each kit contains a set of 4

Part Number	Description
73-R-0U43	T, top, TT, U, Wa, Wx – 29" black strut with white spacer
73-R-0U44	Top, TT, U – 29" black strut with red spacer
73-R-0U45	Top, U – 29" black strut with black spacer
73-R-0U46	Wa, Wx – 29" black strut with orange spacer
73-R-0U47	Wa, Wx – 29" black strut with blue spacer
73-R-0U48	Basin – 24" black strut with white spacer

REPLACEMENT STRUT SETS Each kit contains a set of 4 *Continued*

Part Number	Description
73-R-0U61	Wx - 29" black strut with yellow spacer
73-R-0U63	T - 29" black strut with tan spacer
73-R-0U65	T - 29" black strut with purple spacer

WATER AND PLUMBING

Part Number	Item	Description
HW-D10B-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 10', Blue, 3/4"
HW-D10C-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 10', Red, 3/4"
HW-D10V-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 10', Gray, 3/4"
HW-D20B-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 20', Blue, 3/4"
HW-D20C-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 20', Red, 3/4"
HW-D50B-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 50', Blue, 3/4"
HW-D50C-.75-CFCF	Water Hose	Nylon, F-F Camlocks, 50', Red, 3/4"
HAC-.75	Dust Cap	Cam female to cap a male cam, 1/2" - 3/4"
HAK-1	Hose Adapter Kit	(2) 3/4" Yellow A adapters, (4) 3/4" GHT F x 3/4" NPT M fittings, 1 Y connector (without valve), (2) 3/4" D coupler, camlock, 4 garden hose washers
HAS-.75-GFCF	Adapter	Garden female x cam female
HAS-.75-GFCM	Adapter	Garden female x cam male
HS-X-P	Hand Sprayer	Hand-held quick connect sprayer
SMK-2	Shower Maintenance	Shower maintenance kit PVDF s-Intellijet shut-off nozzles
WP-30-S	Waste Water Pump	Submersible, 110v, 300 GPM rating when used with 10' Hose, 1.2 AMPS @ 115v (less than 1/4 horsepower), built-in pick-up foot, 10' hose and GFI

MISCELLANEOUS SHELTER PARTS

Part Number	Description
FR-24-16	Floor risers, rigid, 16" L x 24" W x 1.75" H
FR-24-48	Floor risers, rigid, 48" L x 24" W x 1.75" H
FR-36-24	Floor risers, rigid, 36" L x 24" W x 1.75" H
FR-66-24	Floor risers, rigid, 66" L x 24" W x 1.75" H
12C0012	Portable snap flooring, 12" L x 24" W x 1.375" H
20K0001	Litter conveyor spacer plate
20K0171	Litter conveyor stop plate
AK-CO-SML	Includes - (12) 9" orange stakes, (1) 2 lb mallet, 6 wind line assembly, 1 bag
AK-CO-MED	Includes - (16) 9" orange stakes, (1) 2 lb mallet, 6 wind line assembly, 1 bag
AK-CO-LRG	Includes - (24) 9" orange stakes, (1) 2 lb mallet, 12 wind line assembly, 1 bag

ADG

AIRBOSS DEFENSE GROUP



Headquarters

8261 Preston Court
Jessup, MD 20794

info@adg.com
www.adg.com

2600 Auburn Court
Auburn Hills, MI 48326

3559 Winton Place,
Suite 2
Rochester, NY 14623

3015 Dunes West Blvd,
Suite 509
Mount Pleasant, SC 29466

970 Rue Landry
Acton Vale, QC J0H 1A0